


The External Remote IR Receiver

The External Remote IR receiver is used to remotely control the machine and includes a 15 meter External Remote IR Receiver cable (**Kramer P/N: 95-0104050**).

IMPORTANT: Before using this kit, check that your machine has a REMOTE IR 3.5mm jack installed on its rear panel. If the connector opening is covered by a black cap, you need to replace this kit with the **Internal IR Connection Kit C-IRR/HDR4F-Kit (Kramer P/N: 95-0106050)**.

The distance between the remote controller and the machine can be extended to up to 60 meters using the optional Kramer Stereo cables, 15 meters each (**Kramer P/N 95-0103050**).

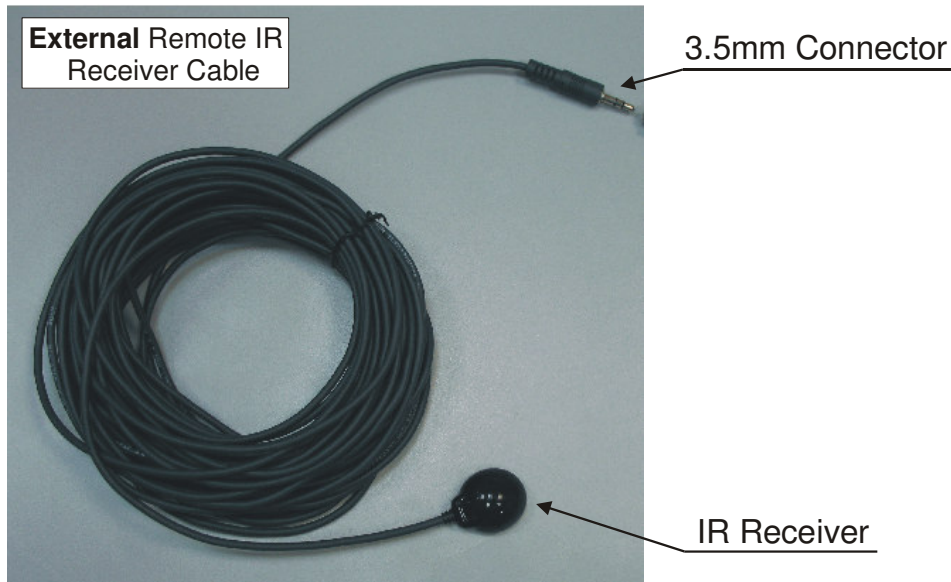

The External Remote IR Receiver connects to the 3.5mm jack on the rear panel of the machine. Once connected, the Kramer machine can be controlled from a distance (the IR Receiver cable is 15 meters long).

Installing the External Remote IR Receiver

1. Turn the machine OFF.
2. Connect the 3.5mm plug of the External Remote IR Receiver cable to the 3.5mm jack on the rear panel.
3. Turn the machine ON.

Once the External Remote IR Receiver cable is connected, the built-in front panel IR receiver is disabled

Electrical Check

To make sure that the cable is properly connected, do the following:

1. Place the external IR Receiver away from the machine (to make sure that you operate the machine via the remote IR receiver and not the built-in one).
2. Point the remote control transmitter at the external IR Receiver and press a few buttons to make sure that it works properly. Every time you press the remote control buttons, the LED in the remote IR receiver and the LED in the built-in IR receiver blink. If the built-in receiver fails to blink you must replace the kit.



External Remote IR Receiver C-A35M/IRR-50 Installation Instructions

For the latest information on our products and a list of Kramer distributors, visit our
Web site: www.kramerelectronics.com



Kramer Electronics, Ltd.

Web site: www.kramerelectronics.com

E-mail: info@kramerelect.com

P/N: 2900-000277 REV 1